

## T-OS16&T-OS17

### 2-Wire Mini Outdoor Station, 1-button&2 button

#### Key Characteristics


##### Basic Function

- Support calling to Indoor Monitor 1 and Indoor Monitor 2
- Support 2 door locks management
- Support IC card
- Adjustable unlock time
- Support external camera extension (Camera Interface Module is needed )
- Surface mounted/Silvery



#### Typical topology



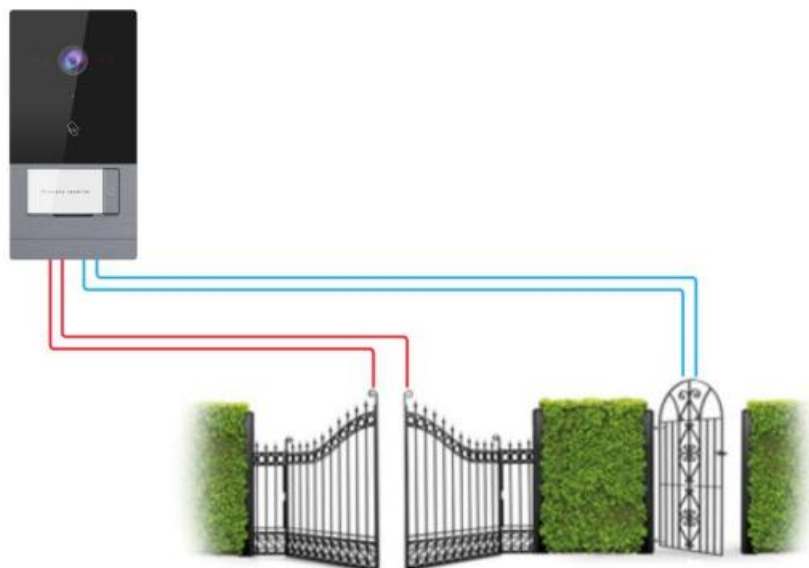

## Parameters

Model No.	1-Button: T-OS16 for Single House 2-Button: T-OS16 for Double Houses
IC Card	Support 200 IC Cards (Administrator card and user cards)
Camera	2MP CMOS Camera
	View Angle Diagonal 130°
	White Balance: Automatic tracking white balance, manual white balance adjustable
	Focus Length: 2.4mm
	Fill-in Light Type: Light Emitting Diode
Working Voltage	DC 24~30V
Quiescent current	≤ 20 mA (DC 30V)
Working current	≤ 110 mA (DC 30V)
Product Dimension	194(L)*120(W)*44.7(D)mm
Working temperature	-25°C~55°C
Storage Temperature	-40°C~70°C
Dimension(L/W/D)	168x86x25mm
Installation Method	Surface-mounted Installation, drill holes on the wall according to the installation size (149.5×64.5mm)

## Appearance and Interfaces

